


HELIOS 9 WH

EX EOS 9 R



FEATURES



CERTIFICATIONS



TREATMENTS

FINITURE

<input type="checkbox"/> ALUMINIUM	99

LED


WHITE 3000 K	WB

LENS


MF - 20°	25
WF - 36°	40

HELIOS 9 WH

03.EOS003E



TECHNICAL

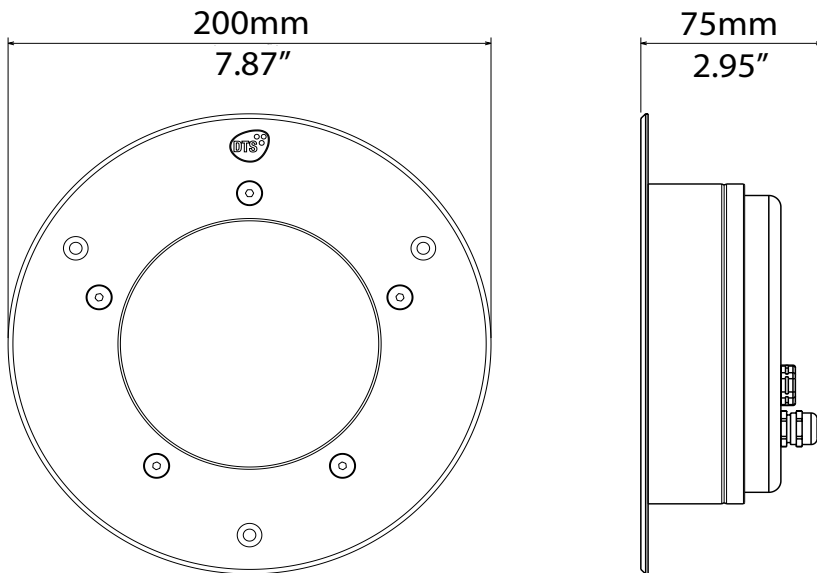

OUTPUT	• 9 x White LEDs
	• Lumens output (3000 K): 1,750 @700 mA
	• LED lifespan: 50,000 hours (70% lumen output)
OPTICAL GROUP	<ul style="list-style-type: none"> • Medium flood 20° • Wide flood 36°
POWER SUPPLY	<ul style="list-style-type: none"> • External CC PSU LED driver 700mA max per channel • Max distance between Drivenet PSU and fixture 100 m
	• Consumption: max 18 W @ 700mA
CONNECTIONS	• 90 cm end-stripped 2-pole cable
PHYSICAL	• Housing: Body in aluminium and flange in Stainless Steel
	• Weight: 2.2 Kg (4.85 lbs)

ACCESSORIES ON REQUEST



Max. 1 unit
0502T031 • Constant current PSU 700mA
 9-:48Vdc



Max 2 units serial wired @ 700mA
0514M240 • Constant current PSU 500-1400mA 60W *Push Dimming *DALI *230Vac
0514M241 • Constant current PSU 500-1400mA 60W *Push Dimming *DALI *100Vac



0509C081 • 2-pole underwater cable



03.LA.190 • Outer case IP20 rated

CONNECTIONS CHART

DRIVENET 28C DIN @48Vdc	DRIVENET 28 EZ	DRIVENET 416	DRIVENET 832	DRIVENET 1664
Max 8 (4 items per output)	Max 8 (4 items per output)	Max 16 (4 items per output)	Max 32 (4 items per output)	Max 64 (4 items per output)