

DRIVENET 28C DIN 2.0



FEATURES



IP20



RDM/DMX



DALI



-10° +40°

CERTIFICATIONS




TREATMENTS

DRIVENET 28C DIN 2.0

03.LA.239



TECHNICAL

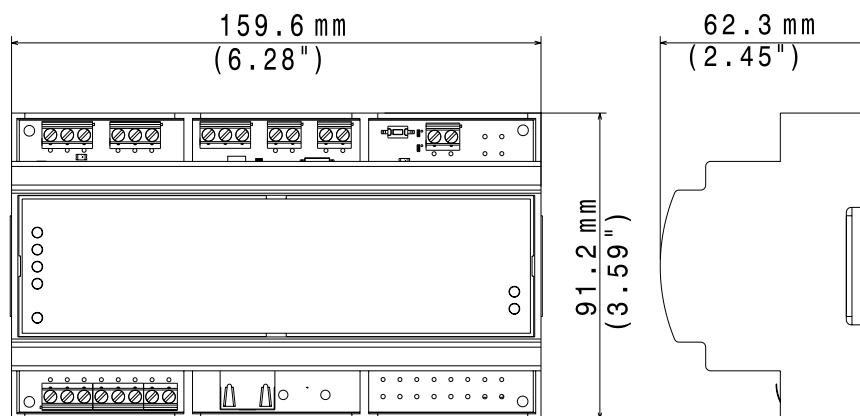

INPUT VOLTAGE	<ul style="list-style-type: none"> 2 Input - 12 to 56 Vdc • 1 x 240 W 48Vdc PSU (code 0502T094) • 2 x 120 W 24Vdc PSU (code 0502T030.1)
OUTPUT CHANNELS	<ul style="list-style-type: none"> • 8 (4 channels x 2 groups)
OUTPUT VOLTAGE	<ul style="list-style-type: none"> • 48Vdc or 24Vdc*
DTS COMPATIBLE PSU	DRIVENET 28 C is compatible with a wide range of input voltage Din rail <ul style="list-style-type: none"> • 1 x 240 W 48Vdc PSU (code 0502T094) • 2 x 120 W 24Vdc PSU (code 0502T030.1)
OUTPUT CURRENT	<ul style="list-style-type: none"> • 700mA Max per channel
CONNECTIONS	<ul style="list-style-type: none"> • Screw terminal / RJ45 connectors
DISPLAY	<ul style="list-style-type: none"> • 4-digit 7-segment LED display + 4 soft keys
DIN MODULES	<ul style="list-style-type: none"> • 9 DIN modules
PHYSICAL	<ul style="list-style-type: none"> • Weight 0.3 kg (0.67 lbs)

* Depend on PSU model